


Tonelux

TR8 and TR8+ Bus Assign Module

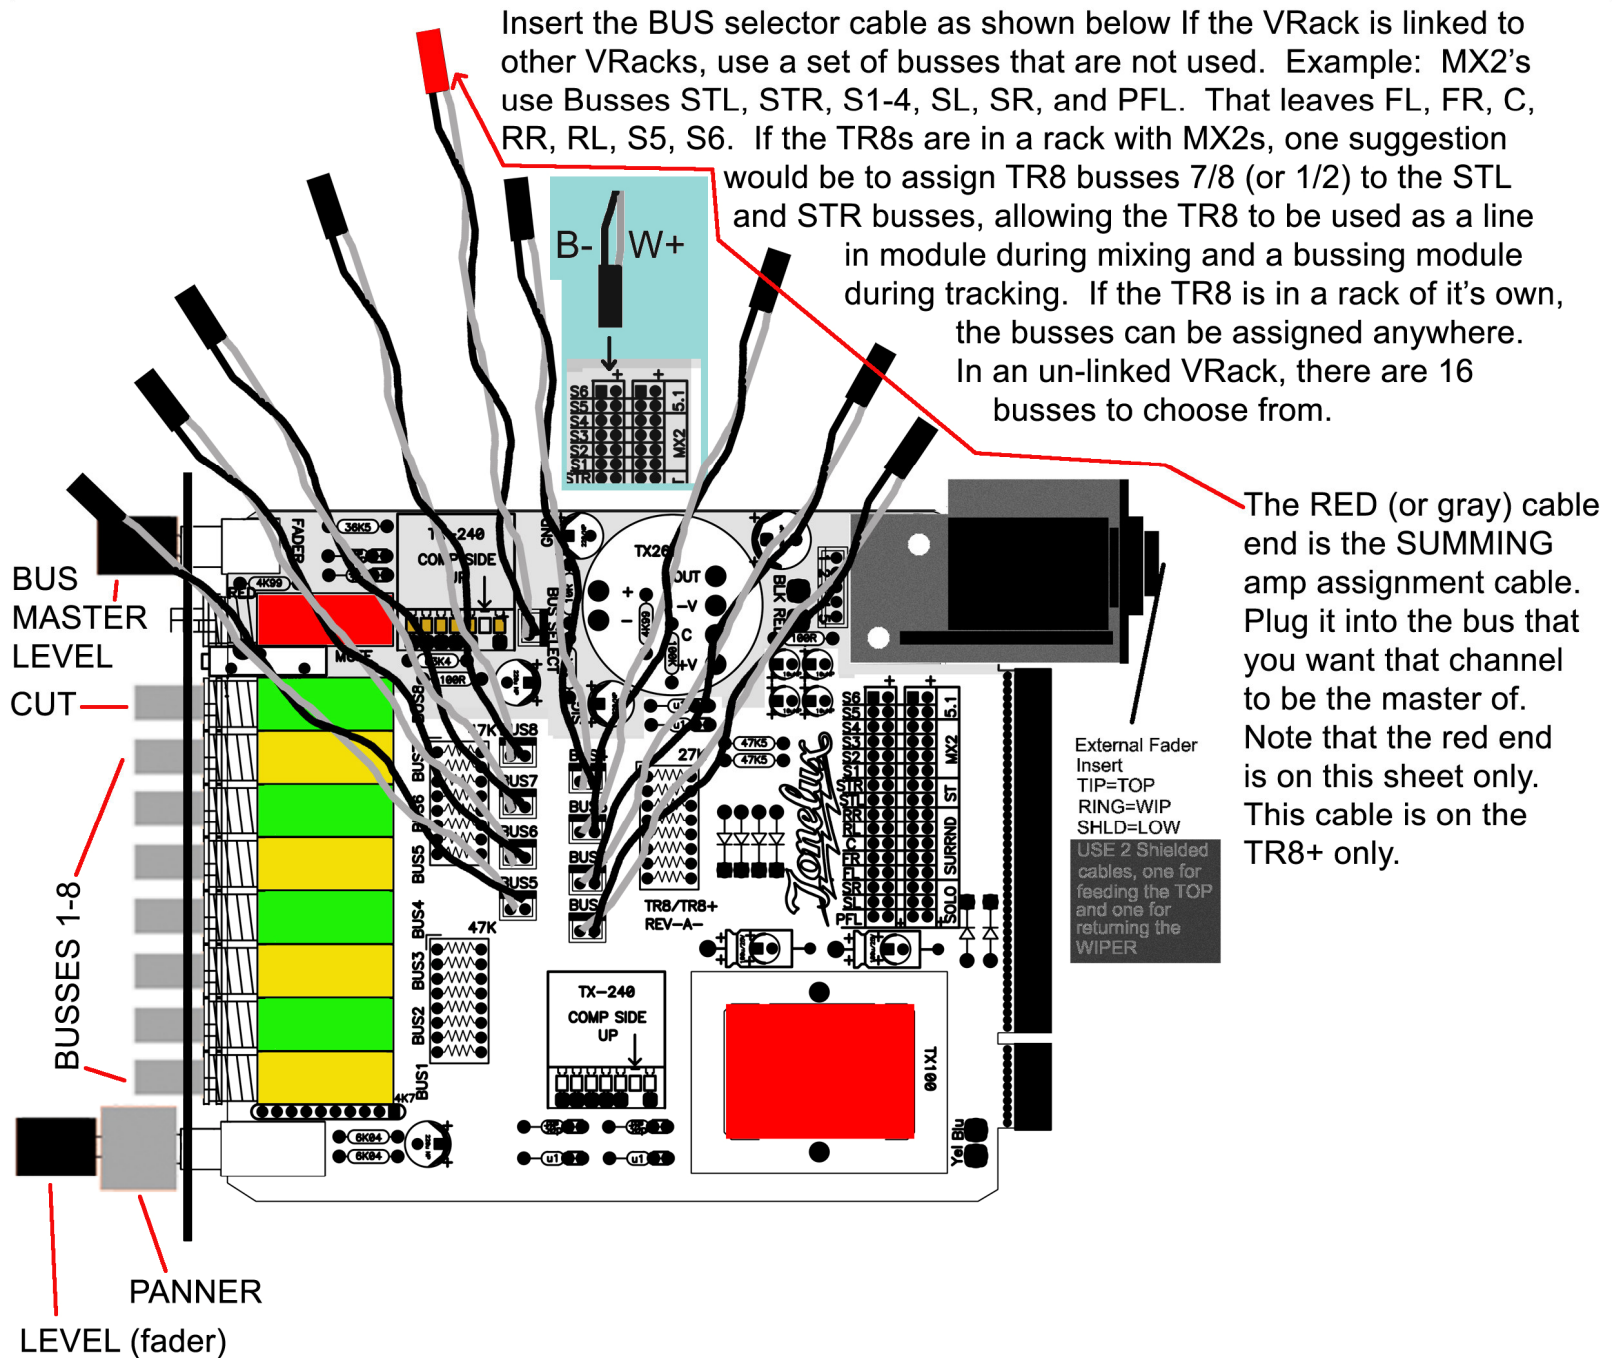

NOTES:

- 1 The "INPUT" is a nominal +4 Balanced input, the "INSERT" is a nominal +10 Balanced input.
- 2 The "OUTPUT" is a nominal +4 Balanced Transformer output.
- 3 The "DIRECT" output is an unbalanced, pre transformer output with a -2 nominal level.
- 4 The CUT button cuts the BUS MASTER OUTPUT only and is on the TR8+ only.
- 5 The TRIM pot adjusts the nominal BUS level from +4 at PAN Left/Right to +4 when PAN is centered.
- 6 The FADER must be full up for +4 in and +4 out.

To replace the gain amplifiers, lift up the top slightly and slide out of the socket. To replace, carefully align the pins and insert the amp as straight as possible.

To replace the power amplifiers, grasp the amp and pull straight out. To replace them align the pins and press evenly with firm pressure. If it is a new amp that has pins longer than 1/4", cut the pins to 1/4" so the amp stays under the maximum width of the module.